

CMCP422VTS-C Series

Loop Powered 4-20mA Velocity Sensor, Side Exit 2 Pin MS 5015



Features:

- Loop Powered 4-20mA Output
- Velocity RMS or Peak
- Side Exit 2 Pin MS 5015 Connector
- Low Profile
- Interfaces Directly to PLC/DCS System
- Two Different Ranges Available
- 10Hz to 1kHz ISO Filtering (600 CPM to 60k CPM)
- -13 to 194°F (-25 to 90°C) Temperature Range
- Sealed to IP68



Typical Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, HVAC, Spindles, Machine Tooling, Process Equipment and many more.

Technical Performance

Mounted Base Resonance:	5 kHz Min.
Ranges:	See Ordering Information Below
Frequency Response:	10 Hz to 1 kHz \pm 5%
	600 CPM to 60k CPM
	ISO 10816
Isolation:	Base Isolated
Measurement Range:	50g peak
Transverse Sensitivity:	Less than 5% with Faraday Cage

Electrical

Output Current:	4-20mA DC Proportional to RMS or Peak Velocity
Supply Voltage:	15 to 30 VDC
Settling Time:	2 Seconds
Output Impedance:	Loop Resistance 600 Ohms Max @ 24VDC
Case Isolation:	>10 ⁸ Ohms at 500 Volts


Environmental

Operating Temperature Range:	-13 to 194°F (25 to 90°C)
Sealing:	IP68
Maximum Shock:	5000 g


Mechanical

Case Material:	Stainless Steel
Sensing Element:	PZT/Compression Type
Mounting Torque:	5.9 ft. lbs (8Nm)
Weight:	6.5 Oz (185g)
Mounting:	1/4"-28 Captive Bolt (Supplied with Sensor)
Mating Connector:	2 Pin MIL 5015 MS Connector

Dimensions

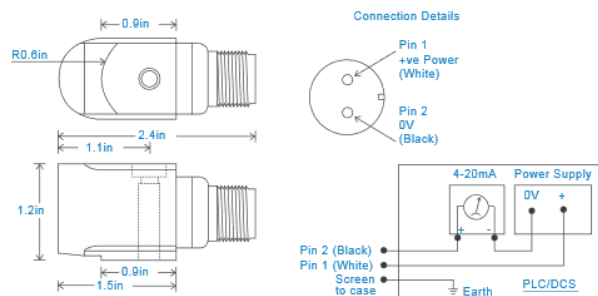

Typical Frequency Response

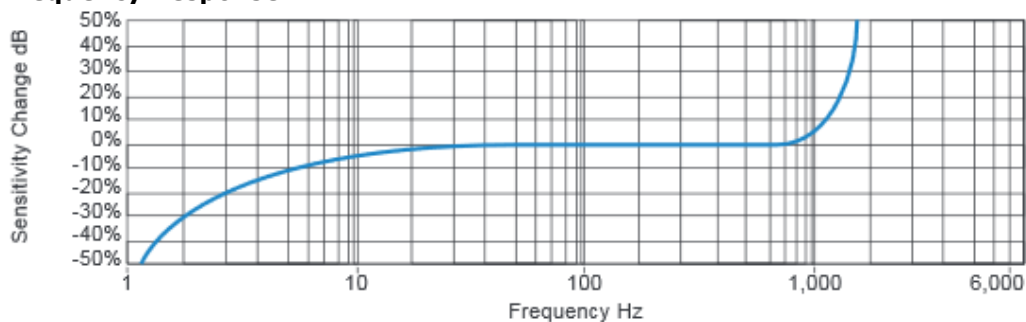

Ordering Information:

CMCP422VTS	-XX	-X	-XXX	Description
	-01			1.00 In/Sec Full Scale (25.4mm/Sec)
	-02			2.00 In/Sec Full Scale (50.8mm/Sec)
		-R		RMS Detection
		-P		Peak Detection
			-C	2 Pin MS 5015 Connector
			-M12	M12 Eurofast Connector
			-I	Integral Braided Armor Cable (5 meters)

Similar Products:



CMCP422VTS-XX-X-I
Integral Armored Cable



CMCP422VTS-XX-X-M12
M12 Eurofast Connector