
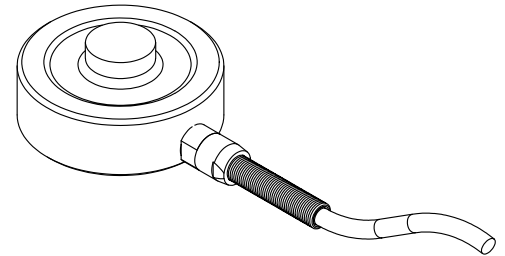


FUTEK MODEL QLA146 COMPRESSION LOAD BUTTON

INCH (mm)		R.O.= Rated Output	
WIRING CODE			
+Excitation	-Excitation	+Signal	-Signal
GREEN	BLACK	WHITE	RED

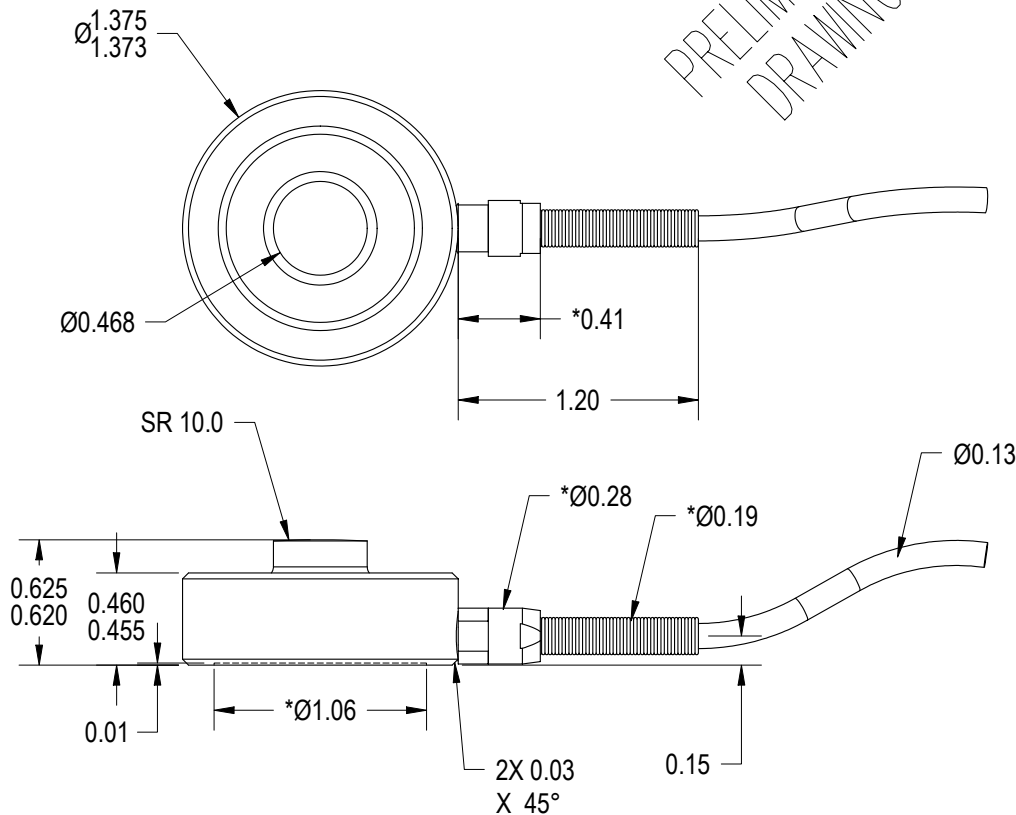

SPECIFICATIONS:

CAPACITY	15000 lb
RATED OUTPUT	2 mV/V nom.
SAFE OVERLOAD	150% of R.O.
ZERO BALANCE	±3% of R.O.
EXCITATION (VDC OR VAC)	18 VDC MAX
BRIDGE RESISTANCE	*700 Ω nom.
COMBINED NONLINEARITY & HYSTERESIS	*±2% of R.O.
TEMP. SHIFT ZERO	±0.02% of R.O./°F
COMPENSATED TEMP.	70 to 250°F
OPERATING TEMP.	-60 to 250°F
MATERIAL	440C R56-60
CABLE:	26 AWG 4 Conductor Braided Shielded Teflon Cable, 40 ft long

NOTE:

- 1) 12 POINT CALIBRATION
 - 6 POINTS LOADING
 - 6 POINTS UNLOADING
- 2) SUBMERSIBLE IN 15 PSI OF NON CONDUCTIVE OIL
- 3) (*) DIMENSIONS/SPECS VARY FROM PRINT SUPPLIED BY CUSTOMER

MATERIAL:

—

HEAT TREATMENT - FINISH:

—

REVISIONS: (Refer to dwg # revision sheet)

△ XXX

OUTLINE DRAWING

STANDARD NOTES: (Unless Otherwise Specified)

- ALL DIMENSIONS ARE IN INCHES
- DRAWING INTERPRETATION DIMS. PER ASME-Y14.5M
- REMOVE BURRS AND BREAK SHARP EDGES .005 - .015
- THREADS PER HANDBOOK H-28
- DIMENSIONS ARE SHOWN AFTER PLATING

ANGLE:

±1/2°

CHAMFER:

±5°

TOLERANCE:

.XX ±.01

.XXX ±.005

3rd ANGLE PROJ.



This drawing is submitted solely for the information and exclusive use of the original addressee. It is not to be divulged in whole or in part, by any firm or individual without written permission from:

FUTEK
ADVANCED SENSOR TECHNOLOGY, INC.

10 THOMAS
IRVINE, CA 92618 USA
Phone: (949) 465-0900
Fax: (949) 465-0905

CAGE: 1X8M6

MODEL: **QLA146**

DRAWN BY: J. VARGAS

APPROVED BY: R. WALKER

DWG No.: **FO1019**

CHECKED BY: XXXXX

DATE: **Sep. 12, 2003**