


The XB housing is an extra-robust, pressure-, saltwater- and corrosion-proof stainless steel housing for one or two sensors. It can contain the same sensor models and electronics like the SM-housing. It is available with a compact stainless steel cable gland and a Subconn cable gland for seawater and underwater usage

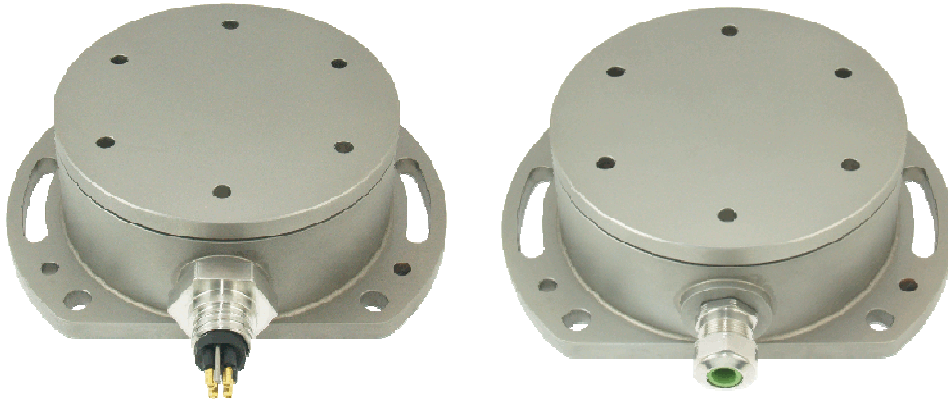

### Features

- extra robust, pressure-, saltwater- and corrosion-proof stainless steel housing
- twist-free 4-point fastening of rigid 3.2mm thick base PCB
- can be equipped with one or two sensors, like the SM-housing
- all sensors fit the housing and can be installed in different directions of operation
- sensors and sensor electronics electrically isolated from housing
- individual calibration protocol
- for electrical characteristics, please see the datasheets of the corresponding SM-sensorboxes, like SM-1I, SM-2I, SM-1S, SM-1U, SBS1U and SM360

### Description

- The XB.. is an extra robust, pressure-, saltwater- and corrosion-proof stainless steel housing with an integrated sensor or sensors and one of the sensor electronic systems described for the SM.. sensor casings.  
The compact stainless steel cable gland and stainless steel housing size enable the use of this high quality measuring system in especially harsh operating conditions.

### Application

- The XB.. is suited for taking precise inclination or acceleration measurements under harsh circumstances and returning of a 0...5V or 4...20mA output signal. Areas of application include construction, mining, agricultural machinery, transportation and conveyor systems, ships, in aggressive fluids and in saltwater, in high pressure environments, operation and automation technology as well as general mechanical engineering.

#### SENSEL MEASUREMENT

41, rue des laitières – 94300 VINCENNES - FRANCE

Tél. : 01 56 88 25 78 - [www.sensel-measurement.fr](http://www.sensel-measurement.fr) - [contact@sensel-measurement.com](mailto:contact@sensel-measurement.com)

S.A.R.L au capital de 7500 Euros - SIRET 502 277 908 00013 - APE 7490 - N° TVA : FR40502277908


## Technical Specifications

Housing material	V4A (saltwater proof)
Cable gland	PG9, clamping range 8mm - 10.5mm
Pressure resistance	10 bar (1Mpa), 100m H2O with Subconn connector - higher pressure resistance is currently being tested
Terminals	depending on the built-in board
Measuring range, resolution, etc.	depending on the integrated sensor(s)
Mounting position	any
Measuring planes (N.. sensor)	3 main housing planes
Measuring plane (NG.. sensor)	parallel to housing bottom
Measuring directions (B.., BD.. sensor)	in X,Y,Z coordinates of housing
Electrical values	please see datasheets of identically equipped SB sensor boxes
Operating temperature	-40...+85°C


## Options

- custom measuring ranges, calibration protocol, silicon encapsulation, custom wiring
- Silicon potting
- Subconn connector and cable for seawater and deep-sea applications
- extended temperature range

**Dimensions**

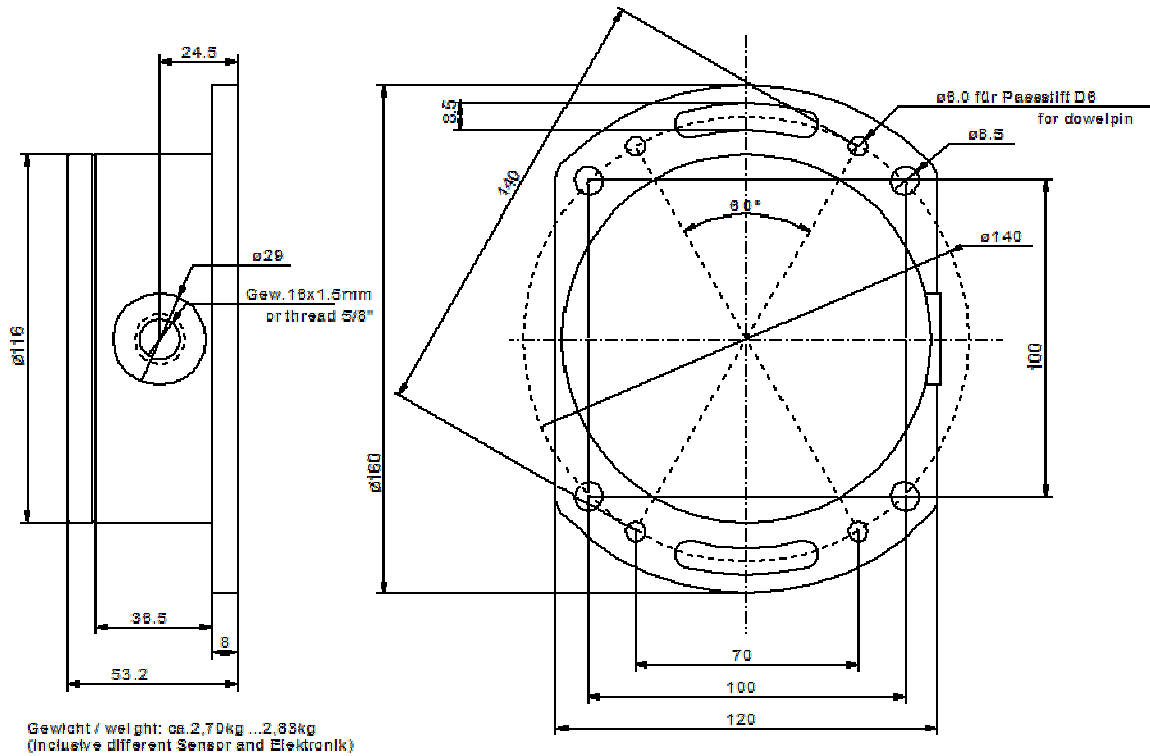

**XB.. with underwater connector or cable gland**

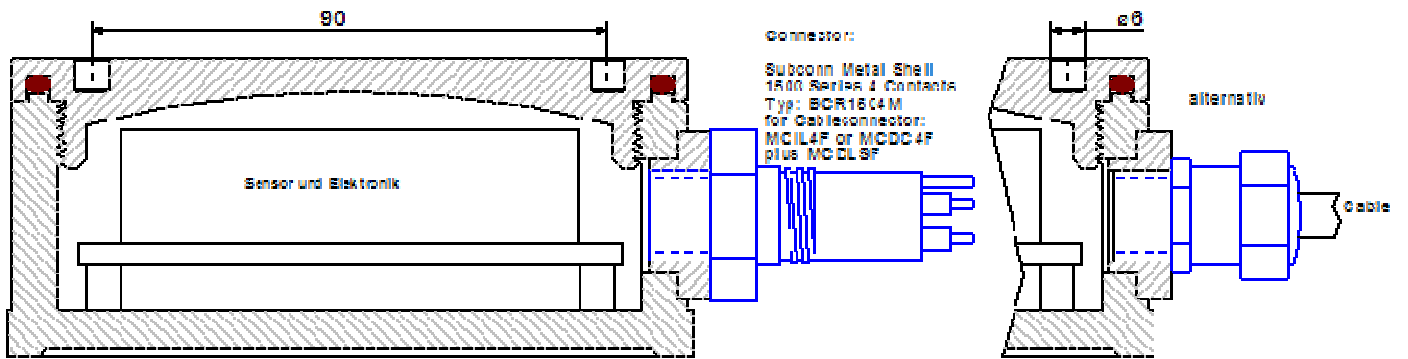

**Accessory - XBW1 Special screw-top opener**

