CAPTEURS, ELECTRONIQUES & ACQUISITION DE DONNEES

CMCP630VP Portable Vibration Pen



Features:

- Quick and Easy to Setup and Use
- Backlit LCD Display for Low Light Conditions
- Lightweight, Compact and Ergonomically Designed Case
- Velocity, Acceleration and Displacement Measurements
- Peak Hold Function
- Hand Pressure
- 30 Hour Battery Life (Continuous Use)
- Rechargeable Battery
- Conforms to ISO2372
- Lanyard, Travel Case, Charger, Storage Bag and ISO 10816-1 Severity Chart Included

Product Overview

The CMCP630VP is a portable, handheld vibration meter designed for operators, maintenance personal and inspectors that complies the ISO 2372 Standard for Mechanical Vibration of Machines Operating from 10 to 200 rev/s (600 to 12,000 RPM). The CMCP630VP features a shockproof high strength aluminum case, backlit LCD display for low light and direct sunlight conditions and a simple two button operation. The Vibration Pen is capable of measuring Acceleration, Velocity and Displacement and can display the highest measurement using the Peak Hold function. The rechargeable lithium-ion battery allows for up to 30 hours of continuous measurements and recharges using a standard 5VDC USB charger which is provided with the kit. An ISO 10816-1 Vibration Severity Chart is included with the kit for easily referencing the measurement with industry standards.

Specifications

5052 Aluminum - Anodized Case Material: Tip Material: 316 Stainless Steel Battery Life: 30 Hours on Full Charge 5V USB Wall Charger (Included) Charger: Velocity Range: 0-8.0 In/S (0-203mm/s) RMS Frequency Range: 10Hz to 1kHz (ISO Standard) Acceleration Range: 0-20g's Peak Frequency Range 1: 10Hz to 1KHz Frequency Range 2: 10Hz to 15kHz Displacement Range: 0-80 mils (2,032um) Frequency Range: 10 to 500Hz Dimensions: 6.11"x0.90"x0.47" (156x23x12mm)


0.11 x0.90 x0.47 (150x25x1

ISO 10816-1	Vibration	Severity	Chart
1000 171 011		a concer a	

	VIBRATION SEVERITY PER ISO 10816-1								
Machine		ne	Class I	Class II	Class III	Class IV			
	in/s	mm/s	Small Machines	Medium Machines	Large Rigid Foundation	Large Soft Foundation			
	0.01	0.28							
ĩ	0.02	0.45							
-N	0.03	0.71		GOOD					
Velocity Vrms	0.04	1.12							
loc	0.07	1.80							
	0.11	2.80		SATISFACTORY					
	0.18	4.50							
Vibration	0.28	7.10		UNSATISFACTORY					
N.	0.44	11.20							
	0.70	18.00							
9	1.10	28.00		UNAC	CEPTABLE				
	1.77	45.90							



Dimensions

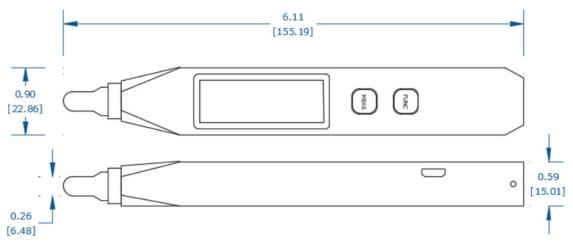

Items Included

Vibration Pen Hard Travel Case USB Wall Charger USB Charging Cable Storage Bag Lanyard Manual ISO 10816-1 Severity Chart

Ordering Information

CMCP630VP-EPortable Vibration Pen Kit, English UnitsCMCP630VP-MPortable Vibration Pen Kit, Metric Units

Images





LCD Display Layout

CMCP630VP

CMCP630VP Rear